

Verification Report



Report No. A2180258692106

Page 1 of 23

CENTRE TESTING INTERNATIONAL



Applicant SHENZHEN SKIHOTAR SEMICONDUCTOR CO.,LTD.
Address A1806, GOLDEN CENTRAL BUSINESS BUILDING, NO. 3037
JINTIAN ROAD, FUTIAN DISTRICT, SHENZHEN, CHINA
Product Name A/K Series

Conclusion

Tested Sample	According to standard/directive	Result
Submitted Sample	2011/65/EU	Pass

Pass means that the results shown on the report comply with the limits set by RoHS Directive 2011/65/EU.

Tested by

Frank Zhang

Reviewed by

Jori Xia

Approved by

Hill Zheng

Date

Mar. 1, 2019



Hill Zheng
Technical Manager

No.S140384365

Centre Testing International Group Co.,Ltd.

CTI Building, Xing Dong Community, Xin'an Sub-district, Bao'an District, Shenzhen City, Guangdong Province, P.R. China

Verification Report

Report No. A2180258692106

Page 2 of 23

Report Content

Sample Information.....	3
Test Requested.....	3
Photo(s) of the Product(s).....	3
Test Method.....	4
Test Result(s).....	5
Test Process.....	13
Photo(s) of the Tested Component(s).....	15
RoHS Directive Exemptions.....	17

Verification Report

Report No. A2180258692106

Page 3 of 23

The following sample(s) and sample information was/were submitted and identified by/on the behalf of the client

Product Part No. STxU4xxxxx;STxS4xxxxx/x stands for different frequency and capacity.

Client Reference Information Axxx/Kxxx/x stands for different form factor and capacity.

Sample Received Date Jan. 4, 2019

Testing Period Jan. 4, 2019 to Jan. 28, 2019

Test Requested

1. As specified by client, to screen Lead(Pb), Cadmium(Cd), Mercury(Hg), Chromium(Cr) and Bromine(Br) in the submitted sample(s) by XRF.
2. As specified by client, when screening results exceed the XRF screening limit in IEC 62321-3-1:2013, further use of chemical methods are required to test the Lead(Pb), Cadmium(Cd), Mercury(Hg), Hexavalent Chromium(Cr(VI)), Polybrominated Biphenyls(PBBs), Polybrominated Diphenyl Ethers(PBDEs) in the submitted samples.

Photo(s) of the Product(s)

A/K Series



Verification Report

Report No. A2180258692106

Page 4 of 23

Test Method

A. Screening limits for regulated elements according to IEC 62321-3-1:2013 (Unit: mg/kg)

Element	Polymers	Metals	Composite material
Pb	$BL \leq (700-3\sigma) < X < (1300+3\sigma) \leq OL$	$BL \leq (700-3\sigma) < X < (1300+3\sigma) \leq OL$	$BL \leq (500-3\sigma) < X < (1500+3\sigma) \leq OL$
Cd	$BL \leq (70-3\sigma) < X < (130+3\sigma) \leq OL$	$BL \leq (70-3\sigma) < X < (130+3\sigma) \leq OL$	$LOD < X < (150+3\sigma) \leq OL$
Hg	$BL \leq (700-3\sigma) < X < (1300+3\sigma) \leq OL$	$BL \leq (700-3\sigma) < X < (1300+3\sigma) \leq OL$	$BL \leq (500-3\sigma) < X < (1500+3\sigma) \leq OL$
Cr	$BL \leq (700-3\sigma) < X$	$BL \leq (700-3\sigma) < X$	$BL \leq (500-3\sigma) < X$
Br	$BL \leq (300-3\sigma) < X$	N/A	$BL \leq (250-3\sigma) < X$

B. Chemical Test

Tested Item(s)	Test Method	Measured Equipment(s)	MDL	Limit
Lead (Pb)	IEC 62321-5:2013	ICP-OES	10 mg/kg	1000 mg/kg
	Refer to IEC 62321-5:2013	ICP-OES	10 mg/kg	
Cadmium (Cd)	IEC 62321-5:2013	ICP-OES	10 mg/kg	100 mg/kg
	Refer to IEC 62321-5:2013	ICP-OES	10 mg/kg	
Mercury (Hg)	IEC 62321-4:2013+ AMD1:2017 CSV	ICP-OES	10 mg/kg	1000 mg/kg
	Refer to IEC 62321-4:2013+ AMD1:2017 CSV	ICP-OES	10 mg/kg	
Hexavalent Chromium (Cr(VI))	IEC 62321-7-2:2017	UV-Vis	20 mg/kg	1000 mg/kg
	IEC 62321-7-1:2015	UV-Vis	0.10 μ g/cm ² (LOQ)	
Polybrominated Biphenyls (PBBs)	IEC 62321-6:2015	GC-MS	100 mg/kg	1000 mg/kg
Polybrominated Diphenyl Ethers (PBDEs)	IEC 62321-6:2015	GC-MS	100 mg/kg	1000 mg/kg

Remark:

- BL = Under the screening limit
- OL = Above the screening limit
- X = The range of needing to do further testing
- 3 σ = The reproducibility of analytical instruments
- N/A = Not applicable
- LOD = Detection limit
- LOQ = Limit of Quantification, The LOQ of Hexavalent chromium is 0.10 μ g/cm²

Verification Report

Report No. A2180258692106

Page 5 of 23

Test Result(s)

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
001	White label with black printing	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
002	Transparent/ blue tape with adhesive paste	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
003	Silver-gray metal	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		
004	Silver-gray metal	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		
005	Silvery plating	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	IN	N.D.▼		
		Br(PBBs&PBDEs)	N/A	/		
006	Metal base	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	IN	N.D.▼		
		Br(PBBs&PBDEs)	N/A	/		

Verification Report

Report No. A2180258692106

Page 6 of 23

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
007	Silvery plating	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		
008	Metal base	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		
009	Gray-black plastic	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
010	Golden/silvery plating	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		
011	Metal base	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		
012	Silver-white plating	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		

Verification Report

Report No. A2180258692106

Page 7 of 23

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
013	Metal base	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		
014	Black resistance (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
015	LED (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
016	Brown capacitance (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
017	Deep brown capacitance (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
018	Black resistance (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	IN	N.D.		
		Br(PBBs&PBDEs)	BL	/		

Verification Report

Report No. A2180258692106

Page 8 of 23

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
019	Deep brown capacitance (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
020	Deep brown capacitance (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
021	Brown capacitance (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
022	Deep brown capacitance (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
023	Black body (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
024	Silvery metal pin	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		

Verification Report

Report No. A2180258692106

Page 9 of 23

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
025	Brown capacitance (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
026	Gray capacitance (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
027	Gray-black magnet	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		
028	Cupreous enamelled wire	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
029	Brown capacitance (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
030	Black body (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		

Verification Report

Report No. A2180258692106

Page 10 of 23

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
031	IC (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
032	IC (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
033	Crystal oscillator (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
034	Black diode (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
035	IC (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
036	IC (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		

Verification Report

Report No. A2180258692106

Page 11 of 23

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
037	Gray-black capacitance (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
038	Gray-black magnet with black printing	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		
039	Cupreous enamelled wire	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
040	PCB (Tested as a whole)	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	IN	N.D.		
041	Silvery metal solder	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		
042	White label with black printing	Pb	BL	/	PASS	Jan. 4, 2019
		Cd	BL	/		
		Hg	BL	/		
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		

Verification Report

Report No. A2180258692106

Page 12 of 23

Remark:

- N.D. = Not Detected (<MDL or LOQ)
- MDL = Method Detection Limit
- mg/kg = ppm = parts per million
- 1000 mg/kg = 0.1%
- /=Not tested
- IN= Uncertain, Further chemical test
- N/A= Not applicable
- BL = Under the screening limit
- ▼The sample is negative for Cr(VI) – The Cr(VI) concentration is below 0.10 µg/cm².
The coating is considered a non-Cr(VI) based coating.
- When conducting the test for PBBs&PBDEs, XRF was introduced to screen Br Exclusively; When conducting the test for Hexavalent Chromium, XRF was introduced to screen Chromium exclusively.
- According to the client's statement, reference information see the following table:

Sample No.	Reference Report No.	Sample No. in Reference Report
002	A2180258692104	002

Verification Report


Report No. A2180258692106

Page 13 of 23


Test Process

1. Lead (Pb), Cadmium (Cd)

1) IEC 62321-5:2013

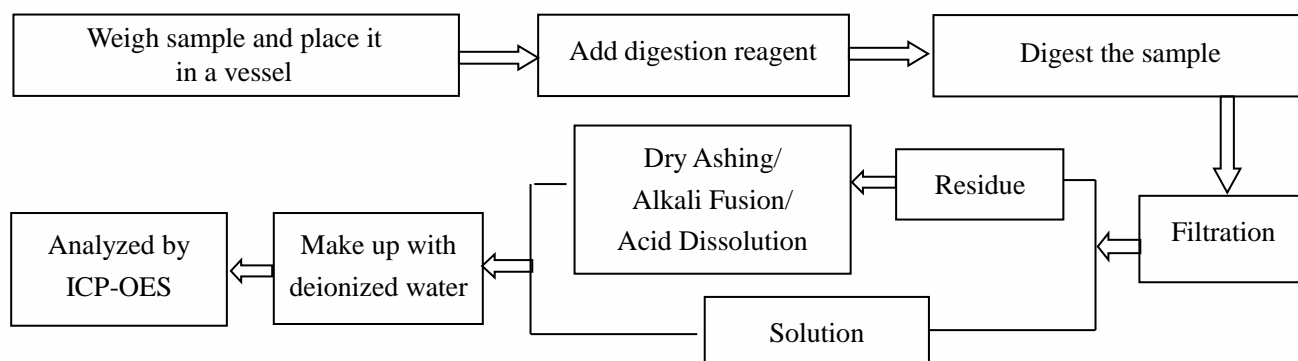


2) Refer to IEC 62321-5:2013

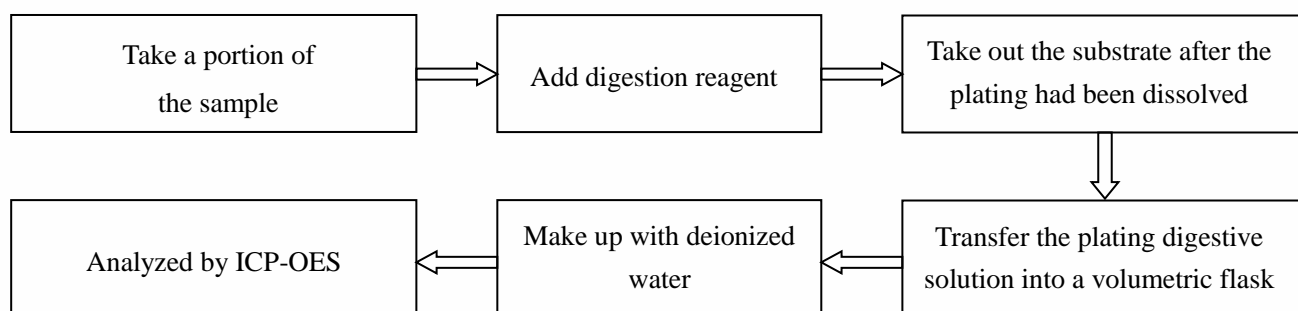

2. Mercury (Hg)

1) IEC 62321-4:2013+AMD1:2017 CSV

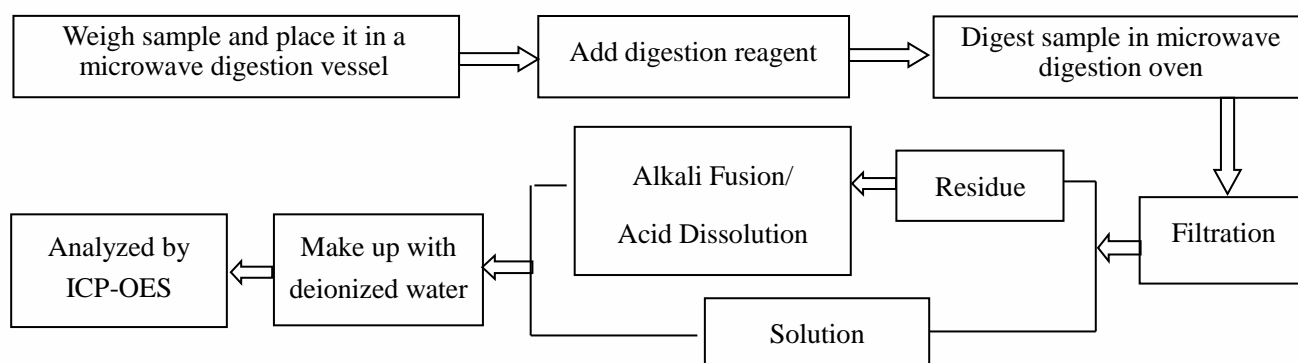


Verification Report

Report No. A2180258692106


Page 14 of 23

2) Refer to IEC 62321-4:2013+AMD1:2017 CSV

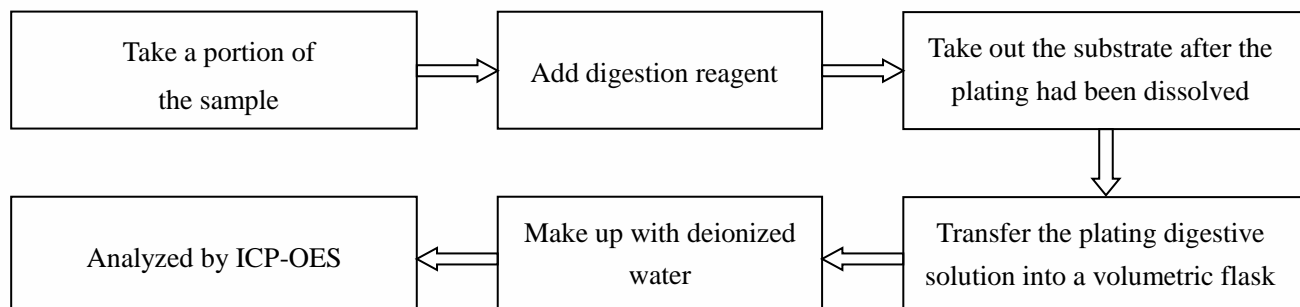


3. Hexavalent Chromium (Cr(VI))


1) IEC62321-7-2:2017

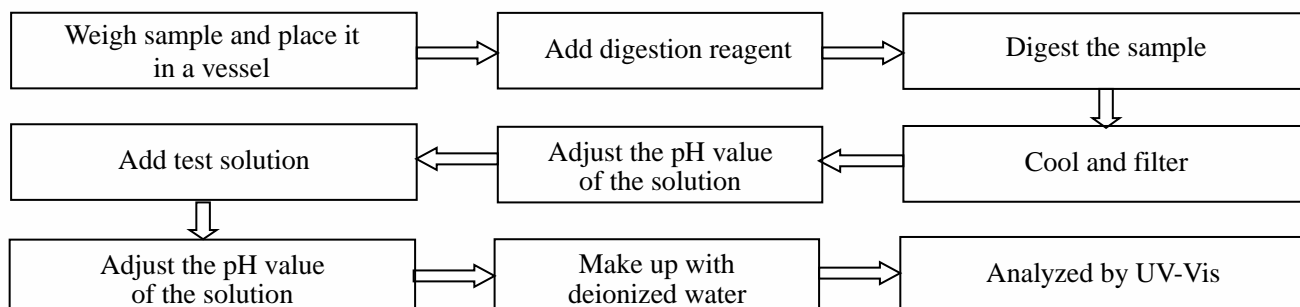

2) IEC 62321-7-1:2015

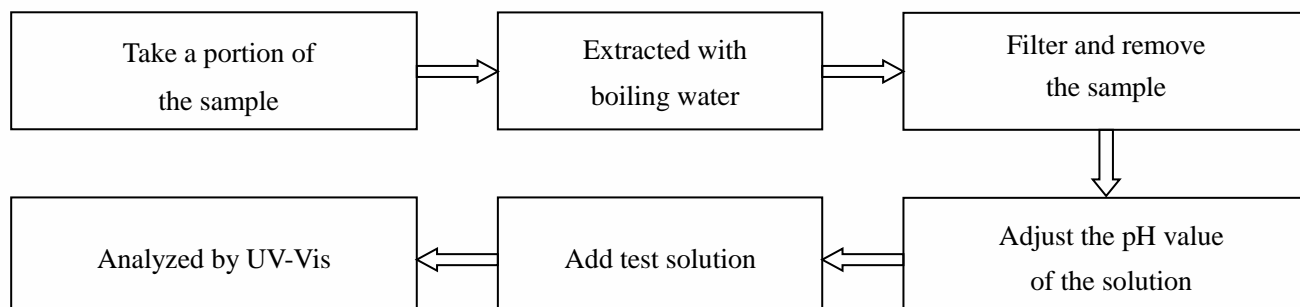

4. Polybrominated Biphenyls(PBBs), Polybrominated Diphenyl Ethers(PBDEs)





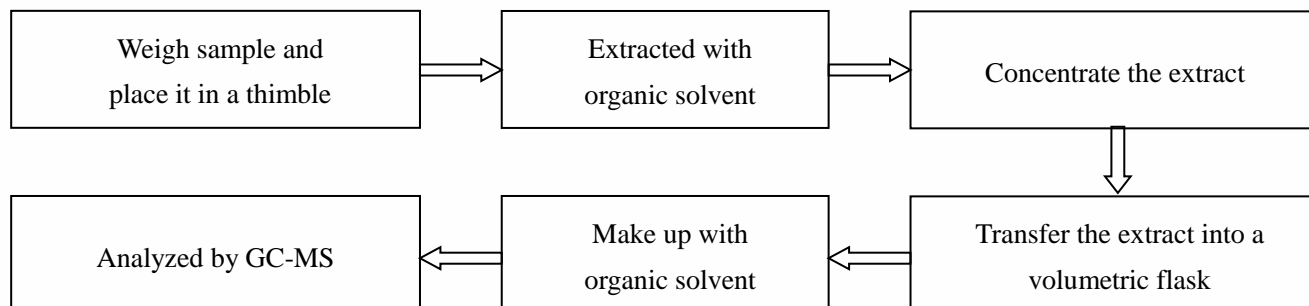


Verification Report

Report No. A2180258692106

Page 15 of 23

Photo(s) of the tested component(s)

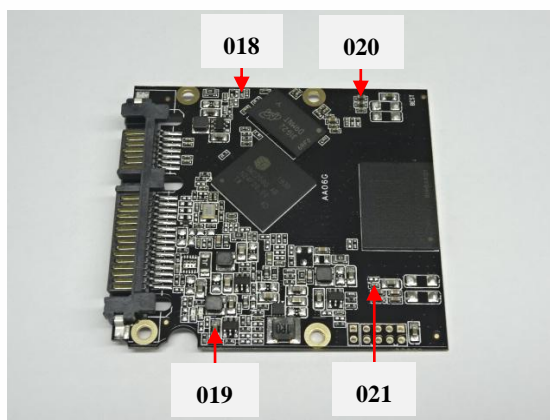
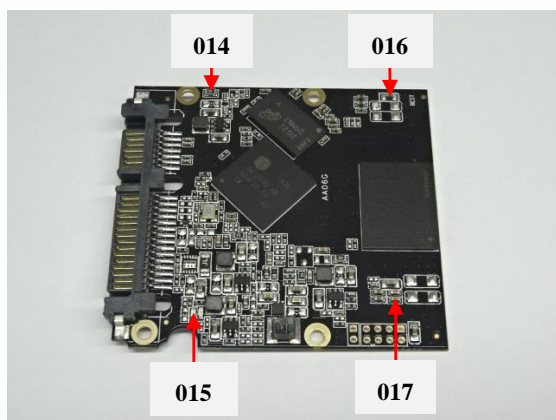
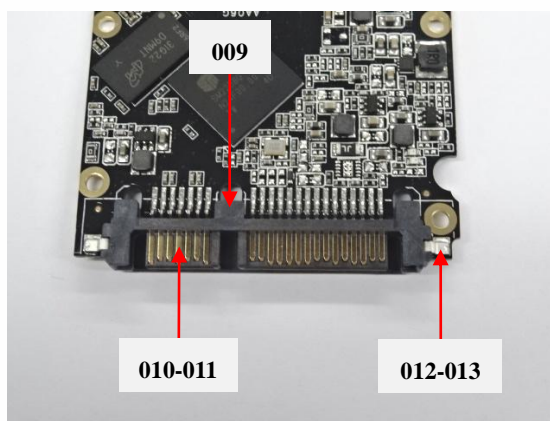
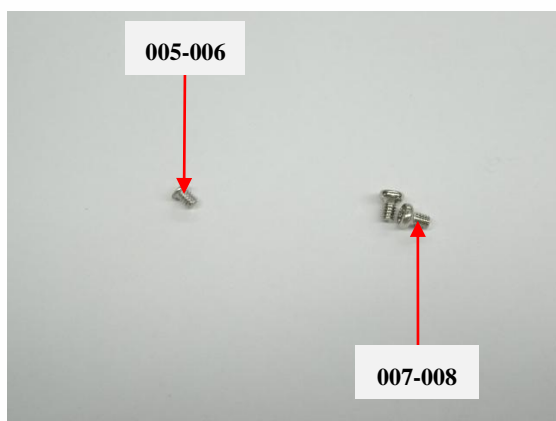
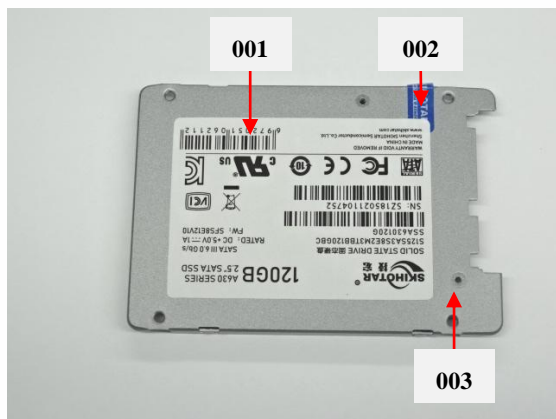


Verification Report

Report No. A2180258692106

Page 16 of 23

Photo(s) of the tested component(s)

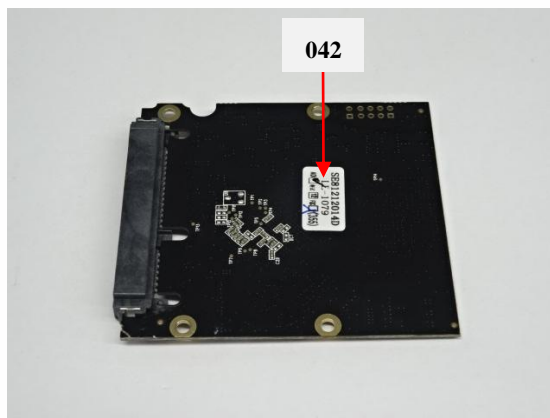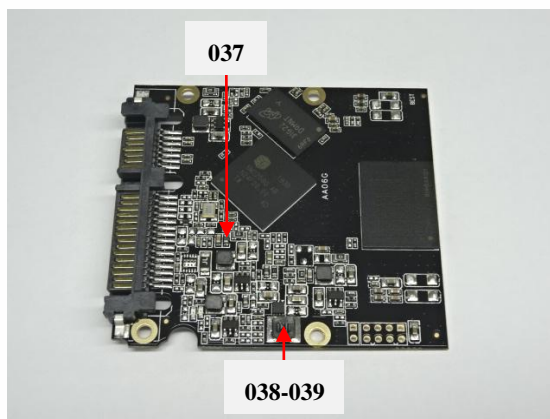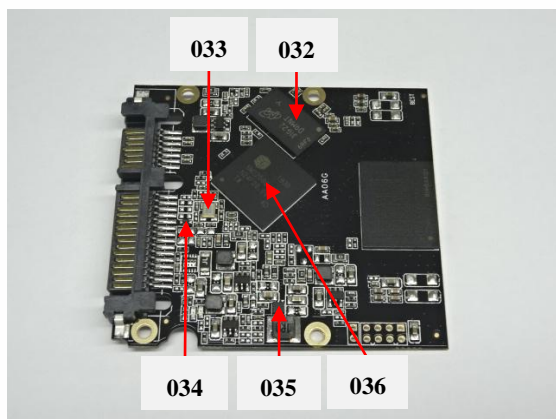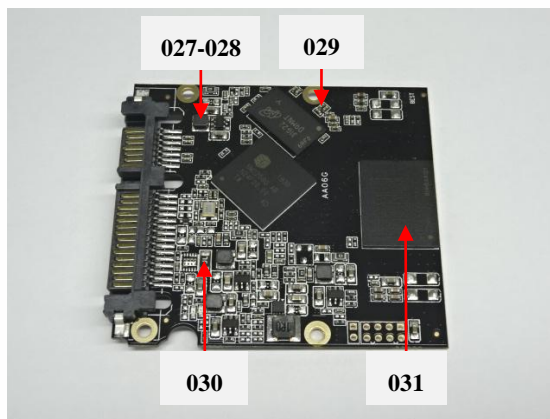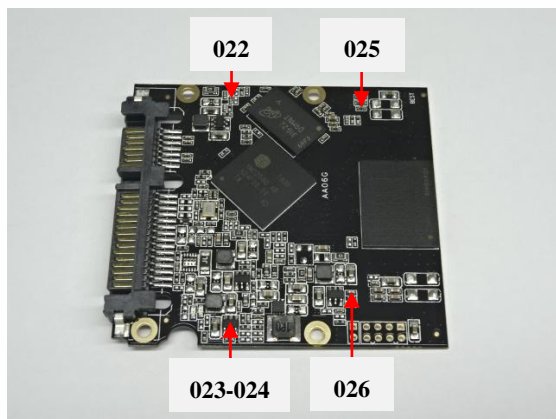

Verification Report

Report No. A2180258692106

Page 17 of 23

Exempted Items of RoHS Directive

In accordance with Directive 2011/65/EU as amended, there are 41 exemption items in Annex III of 2011/65/EU altogether.

	Exemption	Scope and dates of applicability
1	Mercury in single capped (compact) fluorescent lamps not exceeding (per burner):	
1(a)	For general lighting purposes < 30 W: 5 mg	Expires on 31 December 2011; 3,5 mg may be used per burner after 31 December 2011 until 31 December 2012; 2,5 mg shall be used per burner after 31 December 2012.
1(b)	For general lighting purposes \geq 30 W and < 50 W: 5 mg	Expires on 31 December 2011; 3,5 mg may be used per burner after 31 December 2011.
1(c)	For general lighting purposes \geq 50 W and < 150 W: 5 mg	
1(d)	For general lighting purposes \geq 150 W: 15 mg	
1(e)	For general lighting purposes with circular or square structural shape and tube diameter \leq 17 mm	No limitation of use until 31 December 2011; 7 mg may be used per burner after 31 December 2011.
1(f)	For special purposes: 5 mg	
1(g)	For general lighting purposes < 30 W with a lifetime equal or above 20 000 h: 3,5 mg	Expires on 31 December 2017.
2(a)	Mercury in double-capped linear fluorescent lamps for general lighting purposes not exceeding (per lamp):	
2(a)(1)	Tri-band phosphor with normal lifetime and a tube diameter < 9 mm (e.g. T2): 5 mg	Expires on 31 December 2011; 4 mg may be used per lamp after 31 December 2011.
2(a)(2)	Tri-band phosphor with normal lifetime and a tube diameter \geq 9 mm and \leq 17 mm (e.g. T5): 5 mg	Expires on 31 December 2011; 3 mg may be used per lamp after 31 December 2011.
2(a)(3)	Tri-band phosphor with normal lifetime and a tube diameter > 17 mm and \leq 28 mm (e.g. T8): 5 mg	Expires on 31 December 2011; 3,5 mg may be used per lamp after 31 December 2011.
2(a)(4)	Tri-band phosphor with normal lifetime and a tube diameter > 28 mm (e.g. T12): 5 mg	Expires on 31 December 2012; 3,5 mg may be used per lamp after 31 December 2012.
2(a)(5)	Tri-band phosphor with long lifetime (\geq 25 000 h): 8 mg	Expires on 31 December 2011; 5 mg may be used per lamp after 31 December 2011.
2(b)	Mercury in other fluorescent lamps not exceeding (per lamp):	
2(b)(1)	Linear halophosphate lamps with tube > 28 mm (e.g. T10 and T12): 10 mg	Expires on 13 April 2012.

Verification Report

Report No. A2180258692106

Page 18 of 23

2(b)(2)	Non-linear halophosphate lamps (all diameters): 15 mg	Expires on 13 April 2016.
2(b)(3)	Non-linear tri-band phosphor lamps with tube diameter > 17 mm (e.g. T9)	No limitation of use until 31 December 2011; 15 mg may be used per lamp after 31 December 2011.
2(b)(4)	Lamps for other general lighting and special purposes (e.g. induction lamps).	No limitation of use until 31 December 2011; 15 mg may be used per lamp after 31 December 2011.
3	Mercury in cold cathode fluorescent lamps and external electrode fluorescent lamps (CCFL and EEFL) for special purposes not exceeding (per lamp):	
3(a)	Short length (≤ 500 mm)	No limitation of use until 31 December 2011; 3,5 mg may be used per lamp after 31 December 2011.
3(b)	Medium length (> 500 mm and $\leq 1\,500$ mm)	No limitation of use until 31 December 2011; 5 mg may be used per lamp after 31 December 2011.
3(c)	Long length (> 1500 mm)	No limitation of use until 31 December 2011; 13 mg may be used per lamp after 31 December 2011.
4(a)	Mercury in other low pressure discharge lamps (per lamp).	No limitation of use until 31 December 2011; 15 mg may be used per lamp after 31 December 2011.
4(b)	Mercury in High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner) in lamps with improved colour rendering index $R_a > 60$:	
4(b)-I	$P \leq 155$ W	No limitation of use until 31 December 2011; 30 mg may be used per burner after 31 December 2011.
4(b)-II	$155\text{ W} < P \leq 405\text{ W}$	No limitation of use until 31 December 2011; 40 mg may be used per burner after 31 December 2011.
4(b)-III	$P > 405$ W	No limitation of use until 31 December 2011; 40 mg may be used per burner after 31 December 2011.
4(c)	Mercury in other High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner):	
4(c)-I	$P \leq 155$ W	No limitation of use until 31 December 2011; 25 mg may be used per burner after 31 December 2011.
4(c)-II	$155\text{ W} < P \leq 405\text{ W}$	No limitation of use until 31 December 2011; 30 mg may be used per burner after 31 December 2011.
4(c)-III	$P > 405$ W	No limitation of use until 31 December 2011; 40 mg may be used per burner after 31 December 2011.
4(d)	Mercury in High Pressure Mercury (vapour) lamps (HPMV).	Expires on 13 April 2015.
4(e)	Mercury in metal halide lamps (MH)	
4(f)	Mercury in other discharge lamps for special purposes not specifically mentioned in this Annex.	

Verification Report

Report No. A2180258692106

Page 19 of 23

4(g)	Mercury in hand crafted luminous discharge tubes used for signs, decorative or architectural and specialist lighting and light-artwork, where the mercury content shall be limited as follows: (a) 20 mg per electrode pair + 0,3 mg per tube length in cm ,but not more than 80 mg, for outdoor applications and indoor applications exposed to temperatures below 20 °C; (b) 15 mg per electrode pair + 0,24 mg per tube length in cm, but not more than 80 mg, for all other indoor applications.	Expires on 31 December 2018.
5(a)	Lead in glass of cathode ray tubes.	
5(b)	Lead in glass of fluorescent tubes not exceeding 0,2 % by weight.	
6(a)	Lead as an alloying element in steel for machining purposes and in galvanized steel containing up to 0,35 % lead by weight.	
6(b)	Lead as an alloying element in aluminium containing up to 0,4 % lead by weight.	
6(c)	Copper alloy containing up to 4% lead by weight.	
7(a)	Lead in high melting temperature type solders (i.e. lead- based alloys containing 85 % by weight or more lead).	
7(b)	Lead in solders for servers, storage and storage array systems, network infrastructure equipment for switching, signalling, transmission, and network management for telecommunications.	
7(c)-I	Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound.	
7(c)-II	Lead in dielectric ceramic in capacitors for a rated voltage of 125 V AC or 250 V DC or higher.	
7(c)-III	Lead in dielectric ceramic in capacitors for a rated voltage of less than 125 V AC or 250 V DC.	Expires on 1 January 2013 and after that date may be used in spare parts for EEE placed on the market before 1 January 2013.

Verification Report

Report No. A2180258692106

Page 20 of 23

7(c)-IV	Lead in PZT based dielectric ceramic materials for capacitors being part of integrated circuits or discrete semiconductors.	
8(a)	Cadmium and its compounds in one shot pellet type thermal cut-offs.	Expires on 1 January 2012 and after that date may be used in spare parts for EEE placed on the market before 1 January 2012.
8(b)	Cadmium and its compounds in electrical contacts.	
9	Hexavalent chromium as an anticorrosion agent of the carbon steel cooling system in absorption refrigerators up to 0,75 % by weight in the cooling solution.	
9(b)	Lead in bearing shells and bushes for refrigerant -containing compressors for heating, ventilation, air conditioning and refrigeration (HVACR) applications.	Applies to categories 8, 9 and 11; expires on: -21 July 2023 for category 8 in vitro diagnostic medical devices; -21 July 2024 for category 9 industrial monitoring and control instruments and for category 11; -21 July 2021 for other subcategories of categories 8 and 9.
9(b)- (I)	Lead in bearing shells and bushes for refrigerant -containing hermetic scroll compressors with a stated electrical power input equal or below 9 kW for heating, ventilation, air conditioning and refrigeration (HVACR) applications.	Applies to category 1; expires on 21 July 2019.
11(a)	Lead used in C-press compliant pin connector systems.	May be used in spare parts for EEE placed on the market before 24 September 2010.
11(b)	Lead used in other than C-press compliant pin connector systems.	Expires on 1 January 2013 and after that date may be used in spare parts for EEE placed on the market before 1 January 2013.
12	Lead as a coating material for the thermal conduction module C-ring.	May be used in spare parts for EEE placed on the market before 24 September 2010.
13(a)	Lead in white glasses used for optical applications.	Applies to all categories; expires on: -21 July 2023 for category 8 in vitro diagnostic medical devices; -21 July 2024 for category 9 industrial monitoring and control instruments and for category 11; -21 July 2021 for all other categories and subcategories.

Verification Report

Report No. A2180258692106

Page 21 of 23

13(b)	Cadmium and lead in filter glasses and glasses used for reflectance standards.	Applies to categories 8, 9 and 11; expires on: -21 July 2023 for category 8 in vitro diagnostic medical devices; -21 July 2024 for category 9 industrial monitoring and control instruments and for category 11; -21 July 2021 for other subcategories of categories 8 and 9.
13(b)-(I)	Lead in ion coloured optical filter glass types.	Applies to categories 1 to 7 and 10; expires on 21 July 2021 for categories 1 to 7 and 10.
13(b)-(II)	Cadmium in striking optical filter glass types; excluding applications falling under point 39 of this Annex.	
13(b)-(III)	Cadmium and lead in glazes used for reflectance standards.	
14	Lead in solders consisting of more than two elements for the connection between the pins and the package of microprocessors with a lead content of more than 80 % and less than 85 % by weight.	Expires on 1 January 2011 and after that date may be used in spare parts for EEE placed on the market before 1 January 2011.
15	Lead in solders to complete a viable electrical connection between semiconductor die and carrier within integrated circuit flip chip packages.	
16	Lead in linear incandescent lamps with silicate coated tubes.	Expires on 1 September 2013.
17	Lead halide as radiant agent in high intensity discharge (HID) lamps used for professional reprography applications.	
18(a)	Lead as activator in the fluorescent powder (1 % lead by weight or less) of discharge lamps when used as speciality lamps for diazoprinting reprography, lithography, insect traps, photochemical and curing processes containing phosphors such as SMS ((Sr,Ba) ₂ MgSi ₂ O ₇ :Pb).	Expires on 1 January 2011.
18(b)	Lead as activator in the fluorescent powder (1 % lead by weight or less) of discharge lamps when used as sun tanning lamps containing phosphors such as BSP (BaSi ₂ O ₅ :Pb).	
19	Lead with PbBiSn-Hg and PbInSn-Hg in specific compositions as main amalgam and with PbSn-Hg as auxiliary amalgam in very compact energy saving lamps (ESL).	Expires on 1 June 2011.

Verification Report

Report No. A2180258692106

Page 22 of 23

20	Lead oxide in glass used for bonding front and rear substrates of flat fluorescent lamps used for Liquid Crystal Displays (LCDs).	Expires on 1 June 2011.
21	Lead and cadmium in printing inks for the application of enamels on glasses, such as borosilicate and soda lime glasses.	
23	Lead in finishes of fine pitch components other than connectors with a pitch of 0, 65 mm and less.	May be used in spare parts for EEE placed on the market before 24 September 2010.
24	Lead in solders for the soldering to machined through hole discoidal and planar array ceramic multilayer capacitors.	
25	Lead oxide in surface conduction electron emitter displays (SED) used in structural elements, notably in the seal frit and frit ring.	
26	Lead oxide in the glass envelope of black light blue lamps.	Expires on 1 June 2011.
27	Lead alloys as solder for transducers used in high-powered (designated to operate for several hours at acoustic power levels of 125 dB SPL and above) loudspeakers.	Expired on 24 September 2010.
29	Lead bound in crystal glass as defined in Annex I (Categories 1, 2, 3 and 4) of Council Directive 69/493/EEC.	
30	Cadmium alloys as electrical/mechanical solder joints to electrical conductors located directly on the voice coil in transducers used in high-powered loudspeakers with sound pressure levels of 100 dB (A) and more.	
31	Lead in soldering materials in mercury free flat fluorescent lamps (which e.g. are used for liquid crystal displays, design or industrial lighting).	
32	Lead oxide in seal frit used for making window assemblies for Argon and Krypton laser tubes.	
33	Lead in solders for the soldering of thin copper wires of 100 µm diameter and less in power transformers.	
34	Lead in cermet-based trimmer potentiometer elements.	
36	Mercury used as a cathode sputtering inhibitor in DC plasma displays with a content up to 30 mg per display.	Expired on 1 July 2010.
37	Lead in the plating layer of high voltage diodes on the basis of a zinc borate glass body.	

Verification Report

Report No. A2180258692106

Page 23 of 23

38	Cadmium and cadmium oxide in thick film pastes used on aluminium bonded beryllium oxide.	
39	Cadmium in colour converting II-VI LEDs (< 10 µg Cd per mm ² of light-emitting area) for use in solid state illumination or display systems.	Expires on 1 July 2014.
40	Cadmium in photoresistors for analogue optocouplers applied in professional audio equipment.	Expires on 31 December 2013.
41	Lead in solders and termination finishes of electrical and electronic components and finishes of printed circuit boards used in ignition modules and other electrical and electronic engine control systems, which for technical reasons must be mounted directly on or in the crankcase or cylinder of hand-held combustion engines (classes SH:1, SH:2, SH:3 of Directive 97/68/EC of the European Parliament and of the Council.	Expires on 31 December 2018.

*** End of Report ***

Statement:

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The sample(s) and sample information was/were provided by the client who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Without written approval of CTI, this report can't be reproduced except in full;
5. In case of any discrepancy between the English version and Chinese version of the testing reports (if generated), the Chinese version shall prevail.